

Prehung 4 Way-Universal Walk Doors

When Style & Economy Matter...

3100 3700 4100

	3100	3700	4100
DOOR CONSTRUCTION			
28 gauge hot dipped galvanized embossed steel panels	■		
24 gauge hot dipped galvanized smooth steel panels		■	■
.017 white painted stucco embossed aluminum	■		
Panel strengthened with extruded aluminum reinforcing blocks at entry lock	■	■	■
Panel strengthened with extruded aluminum reinforcing blocks at entry lock, dead bolt, panic bar and closers			■
WEATHERSTRIPPING			
Master Frame weatherstripped with woven polypropylene pile	■	■	
Master Frame weatherstripped with closed cell foam encased in a skin of thermoplastic elastomer (TPE)			■
PANEL OPTIONS			
Standard Panel, No Lite	■	■	■
22" x 22" vue lite fabricated of single glazed 1/8" tempered glass	■	■	■
22" x 22" vue lite sealed insulated glass consisting of two pieces of 1/8" tempered glass with 1/2" dead air space			■
22" x 36" nine lite or no-grid one lite sealed insulated glass consisting of two of pieces 1/8" tempered glass with a rigid aluminum grid system installed in the 1/2" dead air space	■	■	■
22" x 36" nine lite sealed insulated glass consisting of two pieces 1/8" tempered glass with a rigid aluminum grid system installed in the 1/2" dead air space on door with crossbuck design		■	■
COLORS			
Mill, unpainted jamb and white painted panel	■		
White, painted jamb and panel	■	■	■
Cocoa Brown, painted jamb and panel	■	■	■

Colors available

Mill (3100 frame only)

White

Cocoa Brown

24 gauge galvanized smooth steel panel (3700, 3750 & 4100)

28 gauge embossed galvanized steel panels (3100, 3125 & 3150)



AJ Manufacturing, Inc.


1-800-328-9448 | Bloomer, WI | www.ajdoor.com



Count on AJ Manufacturing

All doors

- Prehung 4-way universal
- 1-3/4" thick door panel
- Pressure injected with 2.2 pounds of polyurethane foam per cubic foot
- R-12 insulation value
- Extruded aluminum reblocks for lock
- White and brown panels and jams
- Rolled edge door panel

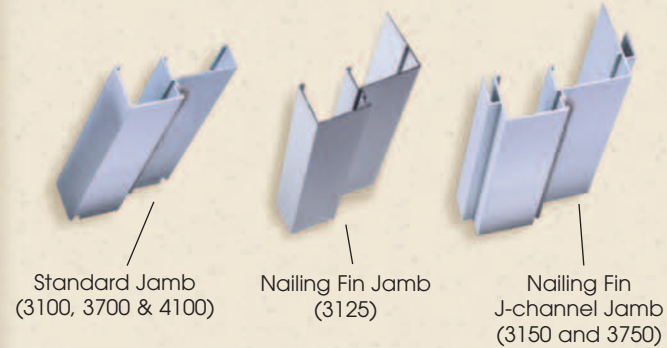

3100

- 28 gauge embossed steel skin
- Woven polypropylene pile weatherstripping

3125

- 3100 panel in an aluminum nailing fin trim jamb

3150

- 3100 panel in an aluminum nailing fin/J-channel jamb

3700

- 24 gauge smooth steel skin
- Woven polypropylene pile weatherstripping
- Panel available with crossbuck stamped design

3750

- 3700 panel in aluminum nailing fin/J-channel jamb

4100

- 24 gauge smooth steel skin
- Closed cell foam weatherstripping
- Panel available with crossbuck stamped design
- Extra extruded aluminum reblocks for deadbolt, panic bar and closer (as shown to right)



Door Styles



prehung four-way universal swing entry door

- Prepainted with two coats of polyester paint for a durable and long lasting finish
- Door is mounted to the frame by three 12-gauge steel, 4-1/2"x4" fixed pin hinges

- Hinges zinc plated for rust resistance
- 2'4" to 4'0" widths and double doors standard
- Prehung door individually cartoned

- Designed for steel, masonry and wood construction
- All lites are aluminum framed and foamed in place

